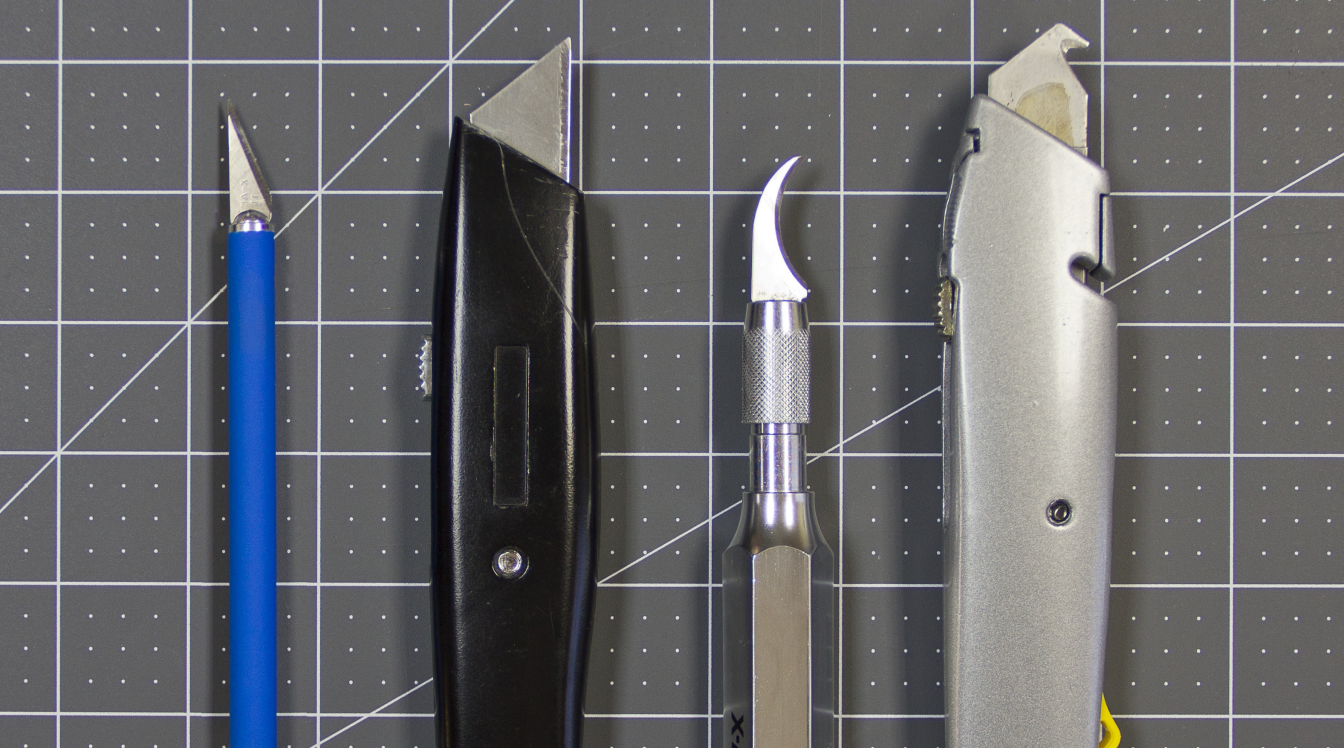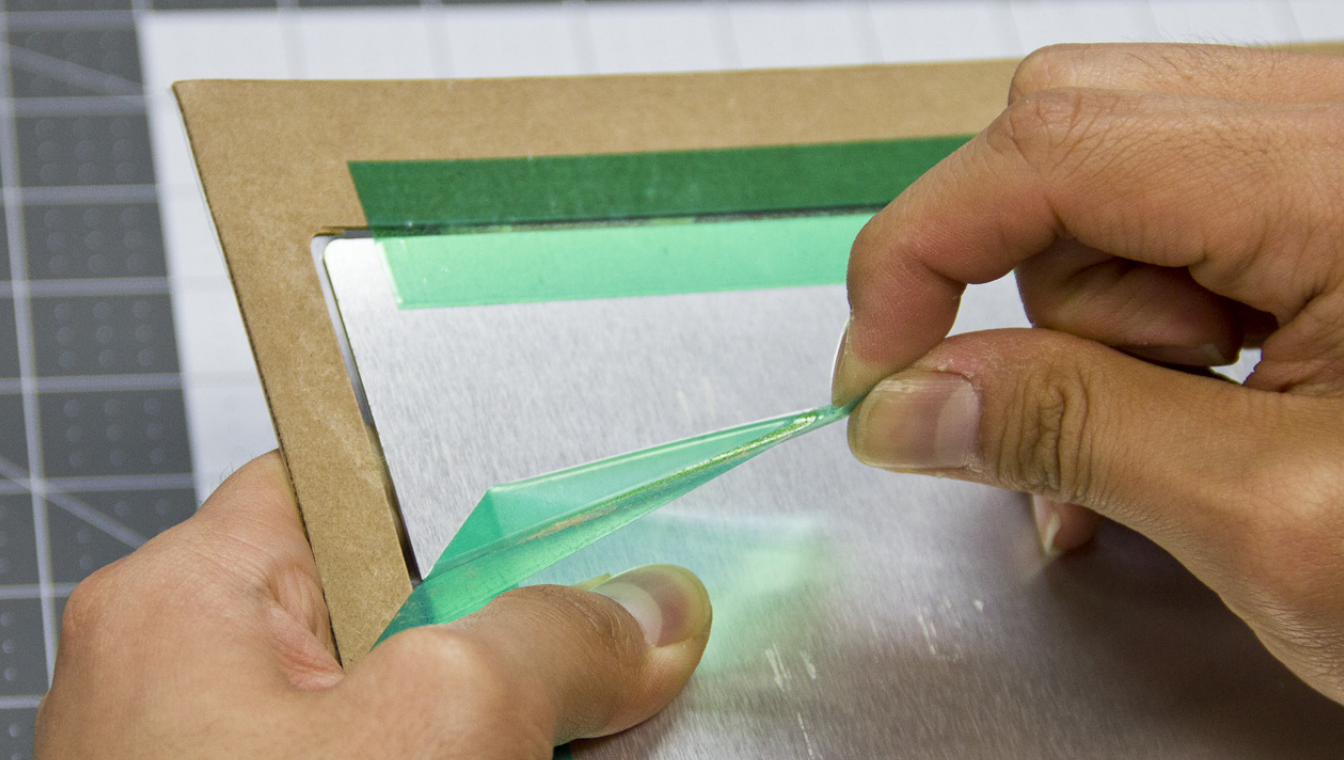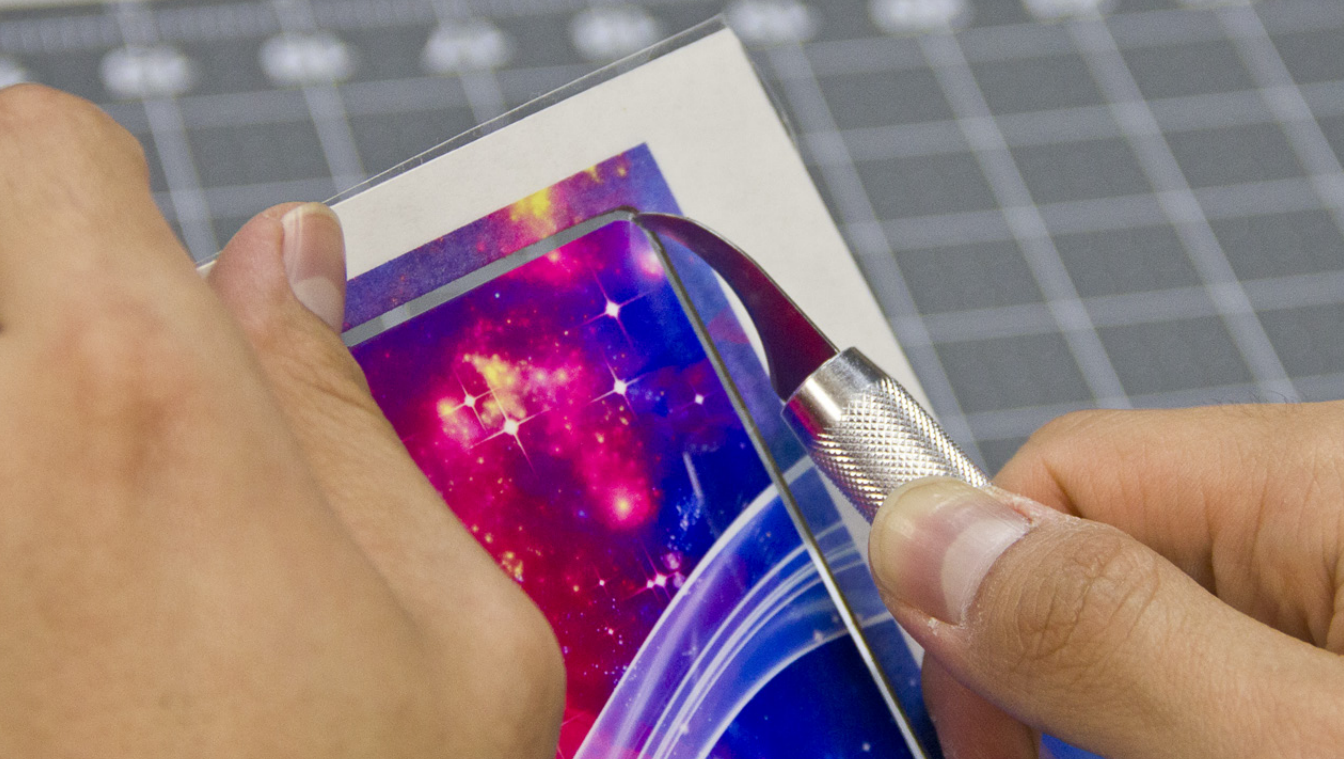# Allure™

How to Remove Your Metal Print from the Carrier

Here are some tools we've used in testing. However, feel free to use what you are most comfortable with that will not damage the metal.

Carefully remove the adhesive tape on each side of the back of your print.

Using your desired tool, puncture a corner of the lamination.

Begin cutting one side of your print by smoothly sliding the blade down.

We've found it easier to cut directly through the end of the carrier when cutting each side.
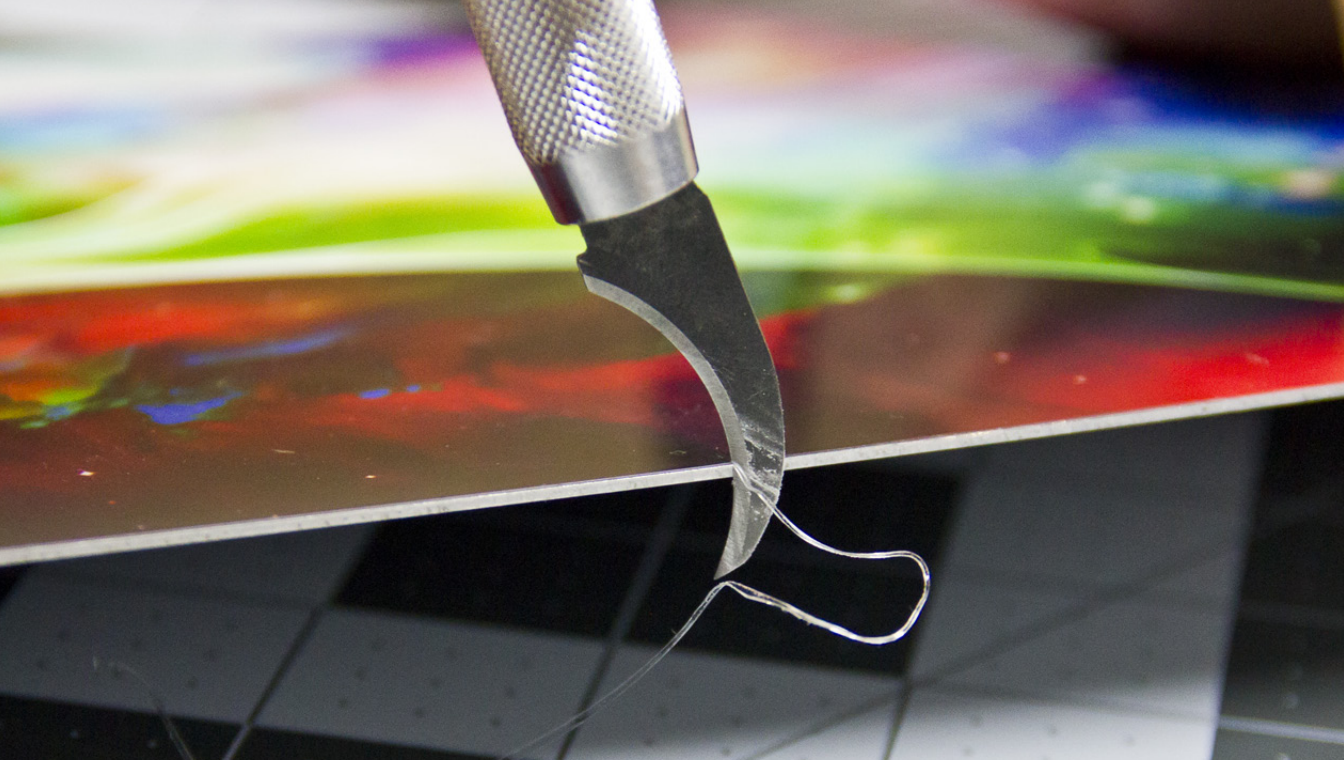
Begin the next side.

Cut all the way through as previously done.

Finally you'll want to go around with your blade to trim any excess laminate that you may have missed.